

10/23/00

A

10/20/00  
jc955 U.S. PTO

PEARSON & PEARSON, LLP

ATTORNEYS AT LAW

GATEWAY CENTER

10 GEORGE STREET

LOWELL, MASSACHUSETTS 01852

TELEPHONE (978) 452-1971

FAX (978) 453-8887

E-MAIL: patlaw@pearson-pearson.com

jc922 U.S. PTO  
09/693034  
10/20/00

PATENTS  
TRADEMARKS  
COPYRIGHTS  
TRADE SECRETS  
LICENSING

GARDNER W. PEARSON

1869-1953

JOHN HOWARD PEARSON

1910-1985

JOHN HOWARD PEARSON, JR.

GEORGE A. HERBSTER

DANIEL J. MANSUR

WALTER F. DAWSON

In Re : Gerald E. Schmidt and James M. Glynn  
Serial No. : NEW NONPROVISIONAL PATENT APPLICATION  
Filed : HERewith  
For : **IMPACT-REINFORCED PIEZOCOMPOSITE TRANSDUCER  
ARRAY**

EXPRESS MAIL NO. : **EK 253 670 351 US**  
Lowell, Massachusetts  
October 20, 2000

I hereby certify that the following correspondence:

SPECIFICATION (30 pgs.)  
5 SHEETS OF DRAWINGS  
TRANSMITTAL FORM 1082  
FILING FEE \$588.00 (Small Business Entity)  
DECLARATION, POWER OF ATTORNEY AND PETITION (Unsigned)  
RETURN POST CARD

is being deposited with the United States Postal Service  
as First Class, Express Mail in an envelope addressed to:

Commissioner of Patents and Trademarks  
Washington, D.C. 20231

on October 20, 2000.

*Walter F Dawson*

WALTER F. DAWSON, Attorney, Reg. No. 30,046

## PTO FORM-1082

Case Docket No. 32444

EXPRESS MAIL NO: EK 253 670 351 US

THE COMMISSIONER OF PATENTS AND TRADEMARKS  
Washington, D.C. 20231

Sir:

Transmitted herewith for filing is the patent application of

Inventor: **Gerald E. Schmidt and James M. Glynn**For: **IMPACT-REINFORCED PIEZOCOMPOSITE TRANSDUCER ARRAY**

Enclosed are:

- ☒ 5 sheets of drawing (Formal)
- ☐ An assignment of the invention to
- ☐ A certified copy of
- ☐ An associate power of attorney to
- ☒ A verified statement to establish small entity status under 37 CFR 1.9 and 37 CFR 1.27.
- ☐

The filing fee has been calculated as shown below:

(Col.1)		(Col.2)	SMALL ENTITY		OR	OTHER THAN A SMALL ENTITY	
FOR:	NO. FILED	NO. EXTRA	RATE	FEE		RATE	FEE
BASIC FEE				\$ 345	OR		\$ 690
TOTAL CLAIMS	34 - 20	14	\$ 9	\$ 126	OR	\$ 18	\$ 252
INDEP CLAIMS	6 - 3	3	\$ 39	\$ 117	OR	\$ 78	\$ 234
[ ] MULTIPLE DEPENDENT CLAIM PRESENTED				\$ 0	OR		0
			TOTAL	\$ 588	OR	TOTAL	\$ 1,176

\*If the difference in Col. 1 is less than zero, enter "0" in Col.2

- ☐ Please charge my Deposit Account No.16-0875 the amount of 0.00.
- ☒ A check in the amount of \$ 588.00 to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 16-0875.
- ☒ Any additional filing fees required under 37 CFR 1.16.
- ☐ Any patent application processing fees under 37 CFR 1.17.
- ☒ The Commissioner is hereby authorized to charge payment of the following fees during the pendency of this application or credit any overpayment to Deposit Account No. 16-0875.
- ☒ Any patent application processing fees under 37 CFR 1.17
- ☐ The issue fee set in 37 CFR 1.18 at or before mailing the Notice of Allowance pursuant to 37 CFR 1.311(b).
- ☒ Any filing fees under 37 CFR 1.16 for presentation of extra claims.

**PEARSON & PEARSON**  
10 George Street  
Lowell, Mass. 01852  
Tel: (978) 452-1971

Respectfully submitted,

*Walter F. Dawson*

WALTER F. DAWSON, Attorney, Reg. No. 30,046

DATE: October 20, 2000

HT:P:\DATA\MATERIAL\32444\PTO\1082.DOC

Jc922 U.S. PTO  
09/693034

EK253670351US

32444

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

**Application of**

**Gerald E. Schmidt and James M. Glynn**

**for**

**IMPACT-REINFORCED PIEZOCOMPOSITE TRANSDUCER ARRAY**

**HT:P:\DATA\MATERIAL\32444\PTO\APP.PTO**

### Background of the Invention

This is a nonprovisional patent application claiming priority of provisional patent application Serial No. 60/160,935, filed October 22, 1999.

#### Field of the Invention

The present invention relates to piezoelectric ceramic-polymer composite transducer arrays, and particularly to acoustic transducer arrays which are suitable for rugged use.

#### Description of Related Art

One example of a rugged use for an acoustic transducer array is as a hydrophone for use as a sensor or transmitter on the hull of an icebreaker or surface-mounted on other equipment used in arctic waters.

At present, such an array, e.g., that used as a hull-mounted array on a ship fitted as an icebreaker, is mounted beneath a reinforced plastic "array window" approximately four inches thick. The array is separated from the reinforced plastic window by a layer of seawater. Thus, the plastic window serves as a part of the ice-breaking shell of the ship, and the plastic window and the water layer act as a protective lens to shield the array from impact damage from contact with ice at and below the water surface.

The plastic and water layers, however, also tend to decouple the array from the water medium, significantly

There is a long-felt need for an acoustic array for use in such extreme applications which combines the advantages of ruggedness, e.g., impact resistance, and high sensitivity, particularly at low frequencies. The invention described hereinafter meets such a need.

### Summary of the Invention

Accordingly, it is therefore an object of the present invention to provide an impact-resistant acoustic transducer having a honeycomb structure including a plurality of cells with each cell having a piezoelectric transducer.

It is another object of this invention to provide an impact-resistant acoustic transducer having a honeycomb structure including a plurality of cells, each of the cells having a piezoelectric transducer and each piezoelectric transducer comprises at least one piezocomposite element.

It is a further object of the present invention to provide a piezocomposite transducer array suitable for application in a rugged environment.

It is yet another object of this invention to provide an acoustic transducer array as a hydrophone for use as a sensor or transmitter on the hull of an icebreaker.

It is a further object of this invention to provide an array of piezocomposite transducer elements comprising a plurality of piezoceramic rods encapsulated in a polymeric matrix to form a piezocomposite body.

It is another object of this invention to provide a honeycomb structure having a plurality of cells, each of the cells comprising a 1-3 piezocomposite element.

It is another object of this invention to provide a honeycomb structure having a plurality of cells, each of the cells comprising a 2-2 piezocomposite element.

It is a further object of this invention to wire the piezocomposite transducer elements for sensing or for transmitting or for a combination of sensing and transmitting.

These and other objects are accomplished by an acoustic transducer comprising a honeycomb structure having a plurality of cells, each of the cells comprises a piezoelectric transducer, and each piezoelectric transducer comprises a stack having at least one piezocomposite element. Each of the plurality of cells comprises a multi-sided cell or a cylindrical cell depending on the configuration of the honeycomb structure.

The objects are further accomplished by an acoustic transducer array comprising a honeycomb structure having a plurality of cells, each of the cells comprises a piezoelectric transducer, each piezoelectric transducer comprises a stack having at least one piezocomposite element, each piezocomposite element includes a plurality of piezoceramic elements, the piezoceramic elements being arranged parallel to each other, the plurality of piezoceramic elements of the piezocomposite element being encapsulated in a polymeric matrix forming the piezocomposite element, a front planar surface and a back

planar surface of the piezocomposite element comprise an electrically conductive layer, and a soft pressure release material is disposed around each stack except on a surface of the stack facing a front surface of the acoustic transducer array. The transducer array comprises means disposed adjacent to the plurality of cells for providing waterproofing of the acoustic transducer array. The honeycomb structure comprises a plurality of multi-sided cells. The honeycomb structure may also comprise a plurality of cylindrical cells. The honeycomb structure comprises a matrix of a plurality of strips attached together at cross-over points, the strips being made of an impact-resistant material. The honeycomb structure comprises a molded or drilled-out structure made of an impact-resistant material. The piezocomposite element comprises a 1-3 connectivity configuration. The piezocomposite element comprises a 2-2 connectivity configuration. Each piezocomposite element is separately wired for sensing as a single element. The piezocomposite element may be wired for sensing in a phased array configuration. Each piezocomposite element may be separately wired for transmitting as a single element. Each piezocomposite element may be separately wired for transmitting in a phased array configuration.

The stack comprises the piezocomposite element, an acoustic matching layer adjacent to a front surface of the



piezocomposite element, and a stiffening layer adjacent to a back surface of the piezocomposite element. The stack may also include the piezocomposite element and a stiffening layer adjacent to a back surface of the piezocomposite element. The stack may further include the piezocomposite element and an acoustic matching layer adjacent to a front surface of the piezocomposite element. Each stack comprises wires extending from the front planar surface electrically conductive layer and from the back planar surface electrically conductive layer of the piezocomposite element for wiring the cells in a predetermined manner for operation of the acoustic transducer as a sensor array. Each stack comprises wires extending from the front planar surface electrically conductive layer and from the back planar surface electrically conductive layer of the piezocomposite element for wiring the cells in a predetermined manner for operation of the acoustic transducer as a transmitter array. Also, the stack may comprise a first piezocomposite element disposed adjacent to a second piezocomposite element, an acoustic matching layer adjacent to a front surface of the first piezocomposite element, and a stiffening layer adjacent to a back surface of the second piezocomposite element. In addition, the stack comprises a piezocomposite element, a first acoustic matching layer positioned adjacent to a front surface of the piezocomposite

element, a second acoustic matching layer positioned adjacent to the first acoustic matching layer, and a stiffening layer adjacent to a back surface of the piezocomposite element.

5 The objects are further accomplished by the method of providing an acoustic transducer for operation in a rugged environment comprising the step of providing an impact-resistant honeycomb structure having a plurality of cells, each of the cells comprising a piezoelectric transducer.

10 The objects are further accomplished by the method of providing an acoustic transducer for operation in a rugged environment comprising the steps of providing an impact-resistant honeycomb structure having a plurality of cells, each of the cells comprises a piezoelectric transducer, and providing a stack in each piezoelectric transducer having at  
15 least one piezocomposite element.

20 The objects are further accomplished by a method of providing an acoustic transducer array for operation in a rugged environment comprising the steps of providing a honeycomb structure having a plurality of cells, each of the cells comprises a piezoelectric element, providing in each piezoelectric transducer a stack having at least one piezocomposite element, including a plurality of piezoceramic elements in each piezocomposite element, the piezoceramic elements being arranged parallel to each other, forming the

piezocomposite element by encapsulating the plurality of piezoceramic elements of the piezocomposite element in a polymeric matrix, providing an electrically conductive layer on a front planar surface and a back planar surface of the piezocomposite element, and disposing a soft pressure release material around each stack except on a surface of the stack facing a front surface of the acoustic transducer array. The method comprises the step of providing means disposed adjacent to the plurality of cells for waterproofing the acoustic transducer array. The step of providing a honeycomb structure comprises the step of including in the honeycomb structure a plurality of multi-sided cells. The step of providing a honeycomb structure comprises the step of including in the honeycomb structure a plurality of cylindrical cells. The step of providing the honeycomb structure comprises the step of providing a matrix of a plurality of strips attached together at cross-over points, the strips being made of an impact-resistant material. The step of providing a honeycomb structure having a plurality of cells comprises the step of providing at least one piezocomposite element having a 1-3 connectivity configuration in each of the cells. The step of providing a honeycomb structure having a plurality of cells comprises the step of providing at least one piezocomposite



### Brief Description of the Drawings

The appended claims particularly point out and distinctly claim the subject matter of this invention. The various objects, advantages and novel features of this invention will be more fully apparent from a reading of the following detailed description in conjunction with the accompanying drawings in which like reference numerals refer to like parts, and in which:

FIG. 1 is a partial sectional and perspective view of a preferred embodiment of an impact-reinforced honeycomb structure acoustic transducer array;

FIG. 2 is a cross-sectional view of a stack showing a piezocomposite element having a conductive electrode on an upper surface and a lower surface with a wire attached to each electrode and an acoustic matching layer above the piezocomposite element and a backing layer below the piezocomposite element;

FIG. 3A shows a three layer stack comprising a backing layer, positioned below a piezocomposite element, and an acoustic matching layer positioned above the piezocomposite element;

FIG. 3B shows a single layer stack comprising a piezocomposite element;

FIG. 3C shows a two layer stack comprising a base layer below a piezocomposite element;

FIG. 3D shows a two layer stack comprising a piezocomposite element positioned below an acoustic matching layer;

FIG. 4A shows a double piezocomposite element stack having an acoustic matching layer above and a backing layer below the piezocomposite element;

FIG. 4B shows a stack having double acoustic matching layers positioned above the piezocomposite element and a back layer below the piezocomposite element; and

FIG. 5 is a partial sectional and perspective view of another preferred embodiment of an impact-reinforced piezocomposite transducer array having a honeycomb structure with a plurality of cylindrical cells.

### Description of Illustrative Embodiment

Referring to FIG. 1, a perspective view of an impact-reinforced, piezocomposite, acoustic transducer 10 is shown comprising an array of individual piezocomposite transducer elements 12, each placed in a single cell 17 of a honeycomb load supporting structure 18. In FIG. 1 the front 50 of the acoustic transducer 10 is shown as the upper side which is covered by a layer 24 of a fiber reinforced polymer, and the back 52 of the acoustic transducer 10 is considered the bottom side which is a soft matrix material 16.

Referring now to FIG. 1 and FIG. 2, FIG. 2 shows a cross-sectional view of a stack 15 which occupies each cell 17. Each piezocomposite element 12 includes a plurality of piezoceramic rods 34 arranged parallel to one another in a regular array. The rods 34 of each element 12 are encapsulated in a polymeric matrix 36 to form a 1-3 connectivity configured composite body, then the encapsulated composite body is abraded or machined to expose both ends of each ceramic element at opposite upper 38 and lower 40 planar surfaces of the piezocomposite element 12. As used herein, the term "1-3 piezocomposite" is intended to mean a composite of rods 34 or other shapes of a highly piezoelectric or electrostrictive ceramic material in a polymer matrix 36.

Referring to FIG. 2, a cross-sectional view of a stack 15 is shown comprising the piezocomposite element 12 with an acoustic impedance matching layer 20 adjacent to an upper conductive layer 28 of the 1-3 piezocomposite element and a stiffening layer adjacent to a lower conductive layer 30 of the 1-3 piezocomposite element 12. Upper and lower electrically conductive layers 28, 30, respectively, applied to the upper and lower planar surfaces 38, 40 of the piezocomposite element 12 serve as electrodes for the device. The conductive layers 28, 30 are applied to the piezocomposite element by depositing a conventional electrode material such as silver, gold, palladium, or an electrically conductive polymer, on the planar surface to establish electrical contact with the ceramic elements. To act as a transmitter, the wires 32, 33 attached to electrodes 28, 30 are connected to a source of electrical power by conventional means. To act as a receiver or sensor, the wires 32, 33 attached to the electrodes 28, 30 are connected to a means for detecting electrical pulses generated by the sensor in response to acoustic radiation striking the acoustic transducer 10. In FIG. 1, the wires 32, 33 which attach to each piezocomposite element 12 are only shown in stacks 15a, 15b, 15c, 15d.

This type of electroded piezocomposite transducer element 12 is described in U.S. Patent No. 5,340,510, incorporated



herein by reference. Also described in U.S. Patent No. 5,340,510 is an alternate configuration for a piezocomposite element 12 including a multiplicity of parallel blades of piezoceramic material alternating in laminar fashion with layers of polymeric material to form a 2-2 connectivity configured or composite body.

Referring to FIG. 1 and FIG. 5, the piezocomposite elements 12 in the acoustic transducer 10 are each positioned in a stack 15 and the stack is placed within the cell 17 of a protecting and supporting "honeycomb" structure 18 of steel, titanium, fiber reinforced polymer or other impact-resistant material. A metal honeycomb structure 18 is preferred, particularly for underwater applications, and a steel or titanium structure is most preferred. As used herein, the term "honeycomb structure" is intended to mean a supporting structure including an array of cells exhibiting a hexagonal, square, rectangular, triangular, round, or other shape. The cells are of a size and shape selected to optimize the sensitivity and robustness of the device, as further described below. In FIG. 1, the honeycomb structure 18 is fabricated by welding together metal strips. In another embodiment as shown in FIG. 5, the honeycomb structure is fabricated by boring or otherwise forming round or other shaped holes in a metal plate. The piezocomposite elements 12 are acoustically decoupled from

the honeycomb structure 18 and from the surface on which the transducer array is mounted by a layer of a very soft, e.g., voided, polymeric material 16.

Referring now to FIGS. 3A, 3B, 3C and 3D, various embodiments of the stack 15 are shown. FIG. 3A shows the embodiment of stack 15 as shown in FIG. 1 and described above. FIG. 3B shows a stack 40 comprising only the piezocomposite element 41 and without a matching layer 20 or a backing layer 14. FIG. 3C shows a stack 42 having a piezocomposite element 43 with a backing layer 44. FIG. 3D shows a stack 46 having a matching layer 47 positioned in front of the piezocomposite element 48. The characteristics of each stack is determined by the particular application of the acoustic transducer 10.

Referring to FIG. 4A and FIG. 4B, alternate embodiments are shown of stacks 54 and 56 having double elements or layers to achieve various frequencies of operation for the acoustic transducer. FIG. 4A shows a stack 54 having double piezocomposite elements 62, 64, an acoustic matching layer 60 above piezocomposite element 62 and a backing layer 66 below piezocomposite element 64. This stack 54 provides higher acoustic output for a given applied voltage than a single layer stack. Also, this stack has lower electrical impedance than an equivalent single layer stack, allowing better impedance matching to low impedance electrical circuits. Stack 54 can

contain more than two layers of piezocomposite elements for further improved acoustic output and lower electrical impedance than the two layer stack 54.

FIG. 4B shows a stack 56 having double acoustic matching layers 68, 70 positioned above the piezocomposite element 72 and a backing layer 74. This stack 56 provides better acoustic impedance matching between the piezocomposite 72 and the device medium, e.g. water or air, than the equivalent single matching layer device of FIG. 3A. Also, the double matching layers 68, 70 allow broader bandwidth in operation, which improves the acoustic transducer 10 impulse response.

Referring again to FIG. 1 and FIG. 2, each cell 17 of the honeycomb structure 18 comprises a piezocomposite element 12 mounted on a rigid, e.g., steel base backing layer (BL) 14. This base layer 14 works with the acoustic impedance matching layer (ML) 20 disposed on an opposite side of the piezocomposite element 12, described below, to lower the resonant frequency of the device, e.g., for low frequency operation, and this combination forms the stack 15 within the cell 17. As shown in the FIG. 1, the decoupling layer 16 of soft polymer is disposed between the piezocomposite element 12 and the surface on which the device is mounted. In a preferred embodiment, the piezocomposite elements 12 are separately wired in a known manner for sensing or transmitting separately of one

another. In another embodiment, some elements are wired to operate as sensors, while others may operate as transmitters.

5 The acoustic impedance matching layer 20 covers the upper or front side of each piezocomposite element 12. This matching layer 20 has a stiffness sufficient to protect the element with minimal acoustic affect. A preferred material for the matching layer 20 is a glass fiber reinforced polymer 20. More preferred are materials suitable to serve as an acoustic impedance matching layer for the element. Most preferred are materials having an acoustic impedance between that of the piezoceramic rods (or blades) 34 and that of the ambient medium, e.g., sea water, such as, between approximately 10 MRayls and approximately 1.5 MRayls.

10 Also preferably, a thin layer 22 of steel, titanium, or other metal and/or an outer layer 24 of glass fiber reinforced polymer or other impact and abrasion resistant material cover the cells 12 with the piezocomposite elements 12 to provide long term waterproofing. Conveniently, a single sheet of each covers the entire device, protecting all of the cells 17 and the honeycomb structure 18.

15 The most preferred thickness of the thin metal layer 22 is below  $1/20$  of the desired operating wavelength. A thin metal layer 22 of this thickness does not significantly affect the response of the acoustic transducer 10. The thinner the

covering layers 22, 24, the more acoustic vibration (load) is transferred to or from the piezoceramic rods (or blades) 34; however, thinner covering layers require smaller cells 17, which decreases the active (piezocomposite 12) to inactive (honeycomb structure 18 and decoupling layers) surface area ratio. Thus, in a preferred device, the thicknesses of these outer layers 22, 24 and the size of the cells 17 are each selected to optimize the robustness and sensitivity of the device. These parameters may be empirically determined. For example, when the honeycomb supported piezocomposite transducer 10 is mounted on the hull of a ship fitted as an icebreaker, the acoustic transducer 10 is wired conventionally as a sensor or transmitter. Ice or other debris striking the hull of the ship in the area of the transducer array 10 is deflected by the honeycomb structure, adding significant robustness to the array. This robustness enables the use, if desired, of a soft matrix material 16 around the piezocomposite portion of the device, greatly increasing the sensitivity, particularly the low frequency sensitivity, of the device. Thus, the transducer array 10 described herein combines low frequency sensitivity, robustness, and reasonable fabrication cost, and meets a long felt need.

Referring now to FIG. 5, a partial sectional and perspective view of another preferred embodiment of an impact-

reinforced piezocomposite acoustic transducer 90 is shown having a plurality of cylindrical cells 94, each of the cells 94 comprising one of the stacks 96a to 96e. The structure of acoustic transducer 90 is embodied by metal such as steel, aluminum or titanium and comprises a plurality of cylindrical holes bored therein for receiving the stacks 96a-96e and very soft polymeric material 100 surrounding the cylindrical side and bottom of each of the stacks. Each stack 96a-96e comprises an acoustic matching layer 114 above a 1-3 piezocomposite element 112 with electrodes 111, 113 (wires are not shown which attach to the electrodes 111, 113), and a backing layer 110 below the 1-3 piezocomposite element 112. Alternate configurations of stacks 96a-96e may be used as shown in FIGS. 3A to 3D depending on the desired acoustic characteristics of the acoustic transducer 90. For example, the frequency of resonance of the stack can be changed by increasing or decreasing the thickness and mass of the backing structure.

Still referring to FIG. 5, the acoustic transducer 90 is housed within a thin layer 98 of steel, titanium or other metal and an outer layer 99 of glass fiber reinforced polymer or other impact and abrasion resistant material to provide long term waterproofing for the cells 94.

This invention has been disclosed in terms of certain embodiments. It will be apparent that many modifications can

32444

be made to the disclosed apparatus without departing from the invention. Therefore, it is the intent of the appended claims to cover all such variations and modifications as come within the true spirit and scope of this invention.

PEARSON & PEARSON, LLP  
PATENT ATTORNEYS  
GATEWAY CENTER  
10 GEORGE STREET  
LOWELL, MA 01852  
(978) 452-1971

What is claimed as new and desired to be secured by  
Letters Patent of the United States is:

1. An acoustic transducer comprising:  
a honeycomb structure having a plurality of cells; and  
each of said cells comprises a piezoelectric transducer.
2. The acoustic transducer as recited in Claim 1 wherein  
each of said plurality of cells comprises a multi-sided cell.
3. The acoustic transducer as recited in Claim 1 wherein  
each of said plurality of cells comprises a cylindrical cell.
4. An acoustic transducer comprising:  
a honeycomb structure having a plurality of cells;  
each of said cells comprises a piezoelectric transducer;  
and  
each piezoelectric transducer comprises a stack having at  
least one piezocomposite element.
5. The acoustic transducer as recited in Claim 4 wherein  
each of said plurality of cells comprises a multi-sided cell.
6. The acoustic transducer as recited in Claim 4 wherein  
said plurality of cells comprises a cylindrical cell.



7. An acoustic transducer array comprising:

a honeycomb structure having a plurality of cells, each of said cells comprises a piezoelectric transducer;

each piezoelectric transducer comprises a stack having at least one piezocomposite element;

each piezocomposite element includes a plurality of piezoceramic elements, said piezoceramic elements being arranged parallel to each other;

said plurality of piezoceramic elements of said piezocomposite element being encapsulated in a polymeric matrix forming said piezocomposite element;

a front planar surface and a back planar surface of said piezocomposite element comprise an electrically conductive layer; and

a soft pressure release material is disposed around each stack except on a surface of said stack facing a front surface of said acoustic transducer array.

8. The acoustic transducer array as recited in Claim 7 wherein said transducer array comprises means disposed adjacent to said plurality of cells for providing waterproofing of said acoustic transducer array.

9. The acoustic transducer array as recited in Claim 7 wherein said honeycomb structure comprises a plurality of multi-sided cells.

5 10. The acoustic transducer array as recited in Claim 7 wherein said honeycomb structure comprises a plurality of cylindrical cells.

10 11. The acoustic transducer array as recited in Claim 7 wherein said honeycomb structure comprises a matrix of a plurality of strips attached together at cross-over points, said strips being made of an impact-resistant material.

12. The acoustic transducer as recited in Claim 7 wherein said honeycomb structure comprises a molded or drilled-out structure made of an impact-resistant material.

15 13. The acoustic transducer array as recited in Claim 7 wherein said piezocomposite element comprises a 1-3 connectivity configuration.

14. The acoustic transducer array as recited in Claim 7 wherein said piezocomposite element comprises a 2-2 connectivity configuration.

15. The acoustic transducer array as recited in Claim 7 wherein each piezocomposite element is separately wired for sensing as a single element.

5 16. The acoustic transducer array as recited in Claim 7 wherein said piezocomposite element is wired for sensing in a phased array configuration.

10 17. The acoustic transducer array as recited in Claim 7 wherein each piezocomposite element is separately wired for transmitting as a single element.

15 18. The acoustic transducer array as recited in Claim 7 wherein each piezocomposite element is separately wired for transmitting in a phased array configuration.

20 19. The acoustic transducer array as recited in Claim 7 wherein said stack comprises said piezocomposite element, an acoustic matching layer adjacent to a front surface of said piezocomposite element, and a stiffening layer adjacent to a back surface of said piezocomposite element.

25 20. The acoustic transducer array as recited in Claim 7 wherein said stack comprises said piezocomposite element and a

stiffening layer adjacent to a back surface of said piezocomposite element.

21. The acoustic transducer array as recited in Claim 7 wherein said stack comprises said piezocomposite element and an acoustic matching layer adjacent to a front surface of said piezocomposite element.

22. The acoustic transducer array as recited in Claim 7 wherein each stack comprises wires extending from said front planar surface electrically conductive layer and from said back planar surface electrically conductive layer of said piezocomposite element for wiring said cells in a predetermined manner for operation of said acoustic transducer as a sensor array.

23. The acoustic transducer array as recited in Claim 7 wherein each stack comprises wires extending from said front planar surface electrically conductive layer and from said back planar surface electrically conductive layer of said piezocomposite element for wiring said cells in a predetermined manner for operation of said acoustic transducer as a transmitter array.

24. The acoustic transducer array as recited in Claim 7 wherein said stack comprises a first piezocomposite element disposed adjacent to a second piezocomposite element, an acoustic matching layer adjacent to a front surface of said first piezocomposite element, and a stiffening layer adjacent to a back surface of said second piezocomposite element.

25. The acoustic transducer array as recited in Claim 7 wherein said stack comprises a piezocomposite element, a first acoustic matching layer positioned adjacent to a front surface of said piezocomposite element, a second acoustic matching layer positioned adjacent to said first acoustic matching layer, and a stiffening layer adjacent to a back surface of said piezocomposite element.

26. The method of providing an acoustic transducer for operation in a rugged environment comprising the step of:

providing an impact-resistant honeycomb structure having a plurality of cells, each of said cells comprises a piezoelectric transducer.

27. The method of providing an acoustic transducer for operation in a rugged environment comprising the steps of :

providing an impact-resistant honeycomb structure having a plurality of cells, each of said cells comprises a piezoelectric transducer; and

providing a stack in each piezoelectric transducer having at least one piezocomposite element.

28. A method of providing an acoustic transducer array for operation in a rugged environment comprising the steps of:

providing a honeycomb structure having a plurality of cells, each of said cells comprises a piezoelectric element;

providing in each piezoelectric transducer a stack having at least one piezocomposite element;

including a plurality of piezoceramic elements, in each piezocomposite element, said piezoceramic elements being arranged parallel to each other;

forming said piezocomposite element by encapsulating said plurality of piezoceramic elements of said piezocomposite element in a polymeric matrix;

providing an electrically conductive layer on a front planar surface and a back planar surface of said piezocomposite element; and

disposing a soft pressure release material around each stack except on a surface of said stack facing a front surface of said acoustic transducer array.

29. The method as recited in Claim 28 wherein said method comprises the step of providing means disposed adjacent to said plurality of cells for waterproofing said acoustic transducer array.

5 30. The method as recited in Claim 28 wherein said step of providing a honeycomb structure comprises the step of said honeycomb structure having a plurality of multi-sided cells.

10 31. The method as recited in Claim 28 wherein said step of providing a honeycomb structure comprises the step of said honeycomb structure having a plurality of cylindrical cells.

15 32. The method as recited in Claim 28 wherein said step of providing said honeycomb structure comprises the step of providing a matrix of a plurality of strips attached together at cross-over points said strips being made of an impact-resistant material.

20 33. The method as recited in Claim 28 wherein said step of providing a honeycomb structure having a plurality of cells comprises the step of providing at least one piezocomposite element having a 1-3 connectivity configuration in each of said cells.





Abstract of the Disclosure

1           An impact-reinforced piezocomposite transducer array  
2 comprises a load supporting structure having a plurality of  
3 cells, each of said cells comprises a piezocomposite transducer  
4 element. The load supporting structure comprises a honeycomb  
5 structure having a plurality of multi-sided cells or the  
6 structure comprises a plurality of cylindrical cells. The  
7 piezocomposite element includes a plurality of piezoceramic  
8 rods encapsulated in a polymeric matrix to form a 1-3 composite  
9 body. The transducer array may be used as a hydrophone or a  
10 transmitter in a rugged environment such as on the hull of an  
11 icebreaker ship.



2/5

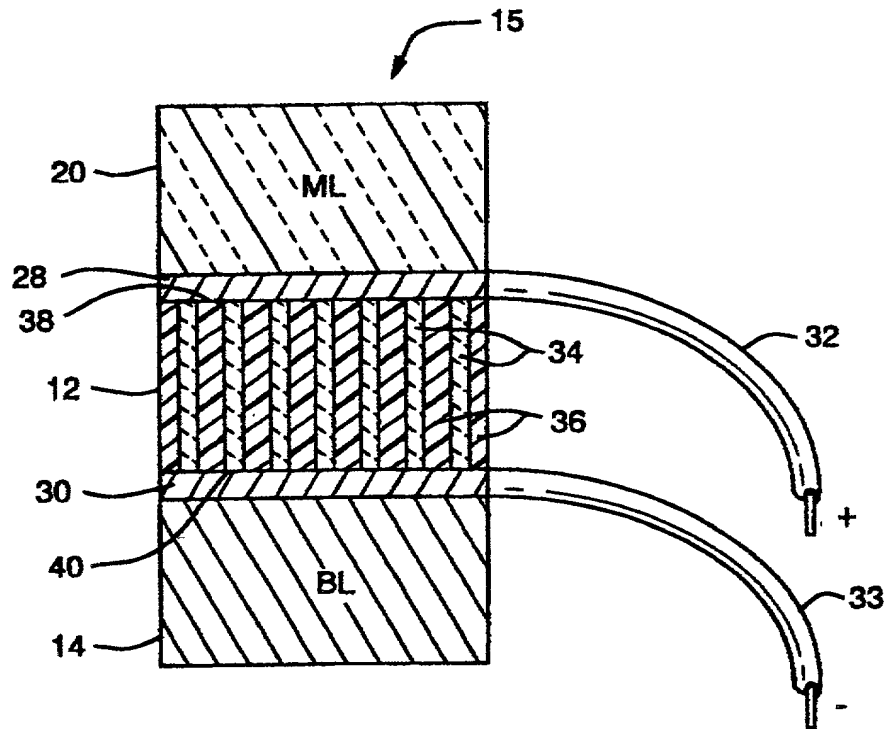


FIG. 2

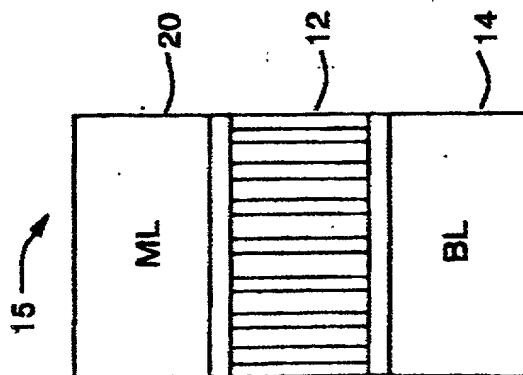


FIG. 3A

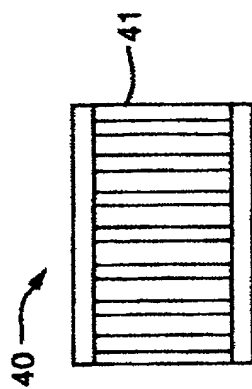


FIG. 3B

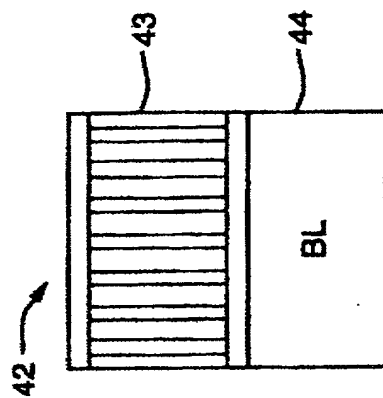


FIG. 3C

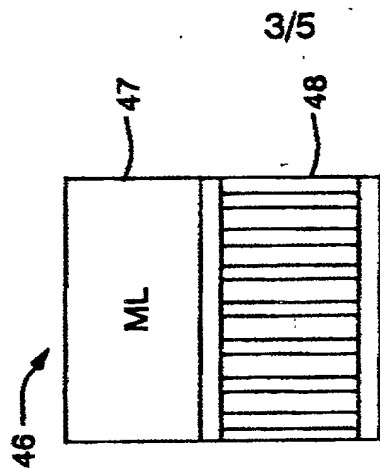


FIG. 3D

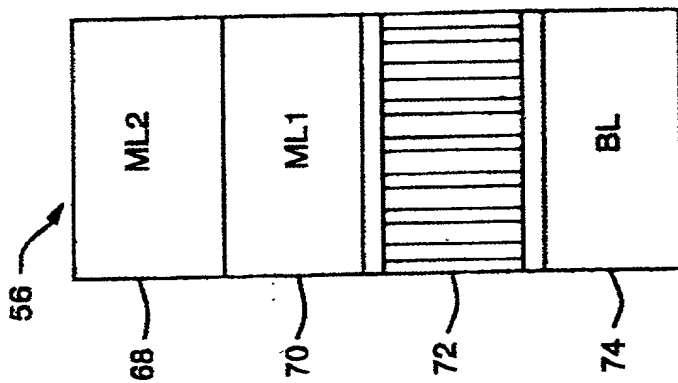


FIG. 4B

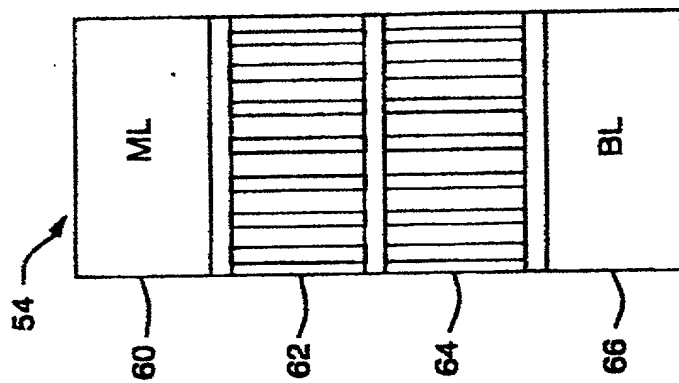
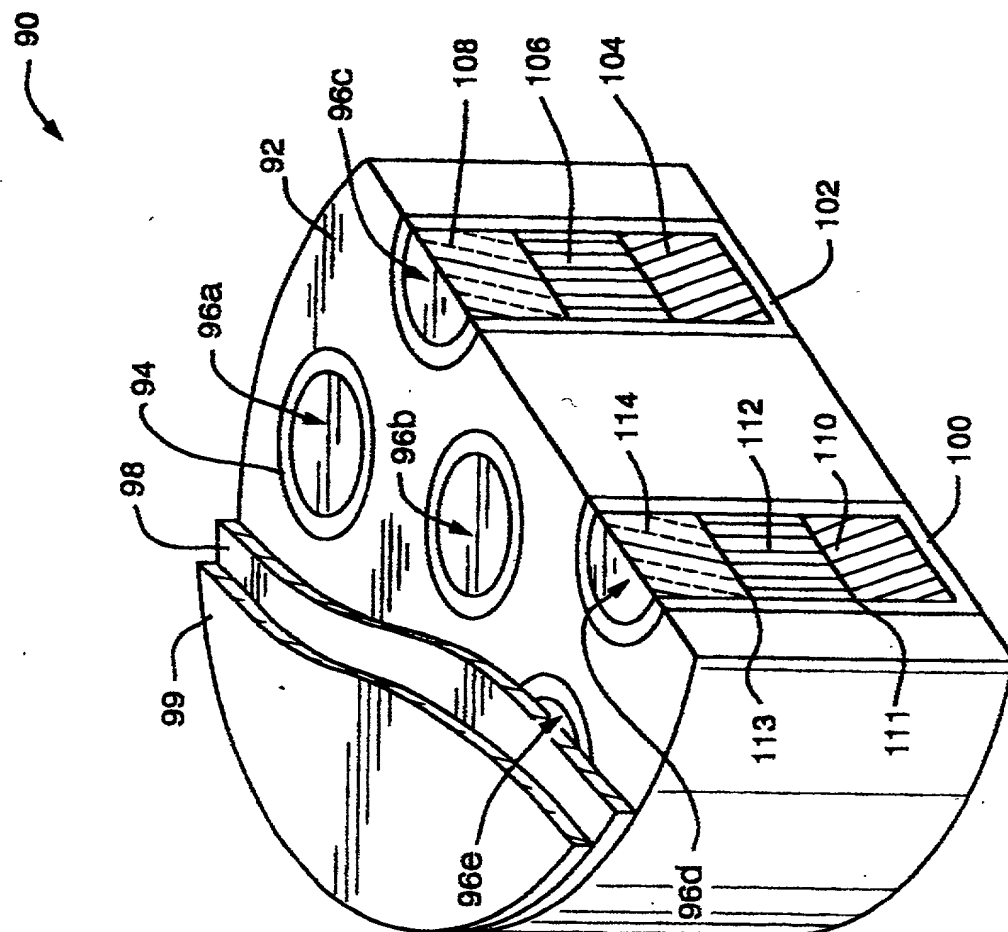


FIG. 4A



**FIG. 5**

## DECLARATION, POWER OF ATTORNEY, AND PETITION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am an original, first and joint inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled:

### IMPACT-REINFORCED PIEZOCOMPOSITE TRANSDUCER ARRAY

which is attached hereto:

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, § 1.56(a).

### PRIOR UNITED STATES APPLICATION(S)

I hereby claim the benefit under Title 35, United States Code, § 119 or § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, § 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

60/160,935  
(Serial No.)

October 22, 1999  
(Filing date)

PENDING  
(Status)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

And I hereby appoint

**JOHN H. PEARSON, JR.** -- **Reg. No. 32,288**  
**GEORGE A. HERBSTER** -- **Reg. No. 24,002**  
**WALTER F. DAWSON** -- **Reg. No. 30,046**  
**SALLY L. PEARSON** -- **Reg. No. 30,312**  
**PEARSON & PEARSON** -- **Reg. No. 16,124**  
**10 GEORGE STREET, LOWELL, MASS. 01852**  
**Tel: (978) 452-1971**

my attorney with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith.

Wherefore I pray that Letters Patent be granted to me for the invention or discovery described and claimed in the foregoing specification and claims, and I hereby subscribe my name to the foregoing specification and claims, declaration, power of attorney, and this petition.

**Full name of inventor Gerald E. Schmidt**

Inventor's signature \_\_\_\_\_ Date: \_\_\_\_\_

Residence 72 Stonegate Road, Chelmsford, Massachusetts 01824  
 Citizenship United States of America  
 Post Office Address 72 Stonegate Road  
 Chelmsford, Massachusetts 01824

**Full name of inventor James M. Glynn**

Inventor's signature \_\_\_\_\_ Date: \_\_\_\_\_

Residence 2 Bellamy Road, Dover, Massachusetts 03820  
 Citizenship United States of America  
 Post Office Address 2 Bellamy Road  
 Dover, Massachusetts 03820

P:\DATA\MATERIAL\32444\PTO\DECLARA.DOC